

Shallow Neural Networks

9/10 分 (90%)

测验, 10 个问题

✓ 恭喜! 您通过了!

下一项



1 / 1 分

1。

Which of the following are true? (Check all that apply.)

 $a^{[2](12)}$ denotes the activation vector of the 2^{nd} layer for the 12^{th} training example.

正确

 $a_4^{[2]}$ is the activation output of the 2^{nd} layer for the 4^{th} training example

未选择的是正确的

 X is a matrix in which each row is one training example.

未选择的是正确的

 X is a matrix in which each column is one training example.

正确

 $a_4^{[2]}$ is the activation output by the 4^{th} neuron of the 2^{nd} layer

正确

 $a^{[2](12)}$ denotes activation vector of the 12^{th} layer on the 2^{nd} training example.

未选择的是正确的

Shallow Neural Networks

9/10 分 (90%)

测验, 10 个问题

 $a^{[2]}$ denotes the activation vector of the 2^{nd} layer.

正确



1 / 1 分

2.

The tanh activation usually works better than sigmoid activation function for hidden units because the mean of its output is closer to zero, and so it centers the data better for the next layer. True/False?



True



正确

Yes. As seen in lecture the output of the tanh is between -1 and 1, it thus centers the data which makes the learning simpler for the next layer.



False



1 / 1 分

3.

Which of these is a correct vectorized implementation of forward propagation for layer l , where $1 \leq l \leq L$?



- $Z^{[l]} = W^{[l]} A^{[l]} + b^{[l]}$
- $A^{[l+1]} = g^{[l+1]}(Z^{[l]})$



- $Z^{[l]} = W^{[l-1]} A^{[l]} + b^{[l-1]}$
- $A^{[l]} = g^{[l]}(Z^{[l]})$



- $Z^{[l]} = W^{[l]} A^{[l-1]} + b^{[l]}$
- $A^{[l]} = g^{[l]}(Z^{[l]})$



正确

$$\bullet Z^{[l]} = W^{[l]} A^{[l]} + b^{[l]}$$

Shallow Neural Networks $A^{[l+1]} = g^{[l]}(Z^{[l]})$

9/10 分 (90%)

测验, 10 个问题



1 / 1 分

4。

You are building a binary classifier for recognizing cucumbers ($y=1$) vs. watermelons ($y=0$). Which one of these activation functions would you recommend using for the output layer?

- ReLU
- Leaky ReLU
- sigmoid

正确

Yes. Sigmoid outputs a value between 0 and 1 which makes it a very good choice for binary classification. You can classify as 0 if the output is less than 0.5 and classify as 1 if the output is more than 0.5. It can be done with tanh as well but it is less convenient as the output is between -1 and 1.

- tanh



1 / 1 分

5。

Consider the following code:

```
1 A = np.random.randn(4,3)
2 B = np.sum(A, axis = 1, keepdims = True)
```

What will be B.shape? (If you're not sure, feel free to run this in python to find out).

- (, 3)
- (1, 3)
- (4,)
- (4, 3)

(4, 1)

Shallow Neural Networks

9/10 分 (90%)

测验, 10 个问题

Yes, we use (keepdims = True) to make sure that A.shape is (4,1) and not (4,). It makes our code more rigorous.



1 / 1 分

6.

Suppose you have built a neural network. You decide to initialize the weights and biases to be zero. Which of the following statements is true?

- Each neuron in the first hidden layer will perform the same computation. So even after multiple iterations of gradient descent each neuron in the layer will be computing the same thing as other neurons.



正确

- Each neuron in the first hidden layer will perform the same computation in the first iteration. But after one iteration of gradient descent they will learn to compute different things because we have "broken symmetry".
- Each neuron in the first hidden layer will compute the same thing, but neurons in different layers will compute different things, thus we have accomplished "symmetry breaking" as described in lecture.
- The first hidden layer's neurons will perform different computations from each other even in the first iteration; their parameters will thus keep evolving in their own way.



1 / 1 分

7.

Logistic regression's weights w should be initialized randomly rather than to all zeros, because if you initialize to all zeros, then logistic regression will fail to learn a useful decision boundary because it will fail to "break symmetry", True/False?

- True

False

Shallow Neural Networks

9/10 分 (90%)

测验, 10 个问题

正确

Yes, Logistic Regression doesn't have a hidden layer. If you initialize the weights to zeros, the first example x fed in the logistic regression will output zero but the derivatives of the Logistic Regression depend on the input x (because there's no hidden layer) which is not zero. So at the second iteration, the weights values follow x 's distribution and are different from each other if x is not a constant vector.



1 / 1 分

8.

You have built a network using the tanh activation for all the hidden units. You initialize the weights to relative large values, using `np.random.randn(...)*1000`. What will happen?



This will cause the inputs of the tanh to also be very large, thus causing gradients to be close to zero. The optimization algorithm will thus become slow.



正确

Yes. tanh becomes flat for large values, this leads its gradient to be close to zero. This slows down the optimization algorithm.



This will cause the inputs of the tanh to also be very large, thus causing gradients to also become large. You therefore have to set α to be very small to prevent divergence; this will slow down learning.



This will cause the inputs of the tanh to also be very large, causing the units to be "highly activated" and thus speed up learning compared to if the weights had to start from small values.



It doesn't matter. So long as you initialize the weights randomly gradient descent is not affected by whether the weights are large or small.



0 / 1 分


9.

Consider the following 1 hidden layer neural network:

Shallow Neural Networks

9/10 分 (90%)

测验, 10 个问题

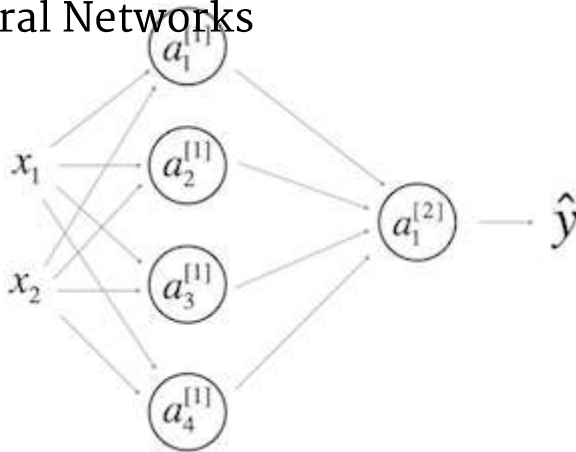

Which of the following statements are True? (Check all that apply).

$W^{[1]}$ will have shape (2, 4)



这个选项的答案不正确

$b^{[1]}$ will have shape (4, 1)



正确

$W^{[1]}$ will have shape (4, 2)



这应该被选择

$b^{[1]}$ will have shape (2, 1)



未选择的是正确的

$W^{[2]}$ will have shape (1, 4)



正确

$b^{[2]}$ will have shape (4, 1)



未选择的是正确的

$W^{[2]}$ will have shape (4, 1)



未选择的是正确的

Shallow Neural Networks

9/10 分 (90%)

测验, 10 个问题

 $b^{[2]}$ will have shape (1, 1)

正确



1 / 1 分

10。

In the same network as the previous question, what are the dimensions of $Z^{[1]}$ and $A^{[1]}$?

 $Z^{[1]}$ and $A^{[1]}$ are (4,2) $Z^{[1]}$ and $A^{[1]}$ are (4,m)

正确

 $Z^{[1]}$ and $A^{[1]}$ are (4,1) $Z^{[1]}$ and $A^{[1]}$ are (1,4)